



Europäisches  
Patentamt


European  
Patent Office

Office européen  
des brevets

Bescheinigung

Certificate

Attestation

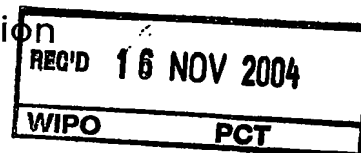

Die angehefteten Unterla-  
gen stimmen mit der  
ursprünglich eingereichten  
Fassung der auf dem näch-  
sten Blatt bezeichneten  
europäischen Patentanmel-  
dung überein.

The attached documents  
are exact copies of the  
European patent application  
described on the following  
page, as originally filed.

Les documents fixés à  
cette attestation sont  
conformes à la version  
initialement déposée de  
la demande de brevet  
européen spécifiée à la  
page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

03104048.8

**PRIORITY  
DOCUMENT**  
SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)

Der Präsident des Europäischen Patentamts;  
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets  
p.o.

R C van Dijk



Anmeldung Nr:  
Application no.: 03104048.8  
Demande no:

Anmeldetag:  
Date of filing: 03.11.03  
Date de dépôt:

Anmelder/Applicant(s)/Demandeur(s):

N.V. BEKAERT S.A.  
Bekaertstraat 2  
8550 Zwevegem  
BELGIQUE

Bezeichnung der Erfindung/Title of the invention/Titre de l'invention:  
(Falls die Bezeichnung der Erfindung nicht angegeben ist, siehe Beschreibung.  
If no title is shown please refer to the description.  
Si aucun titre n'est indiqué se referer à la description.)

Stab-free insert with steel cords and non-woven textile

In Anspruch genommene Priorität(en) / Priority(ies) claimed /Priorité(s)  
revendiquée(s)  
Staat/Tag/Aktenzeichen/State/Date/File no./Pays/Date/Numéro de dépôt:

Internationale Patentklassifikation/International Patent Classification/  
Classification internationale des brevets:

F41H1/00

Am Anmeldetag benannte Vertragsstaaten/Contracting states designated at date of  
filing/Etats contractants désignées lors du dépôt:

AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HU IE IT LU MC NL  
PT RO SE SI SK TR LI

**Field of the invention.**

5 The present invention relates to a stab-resistant insert for protective textile. The stab-resistant insert comprises at least one metal layer and at least one textile layer. The present invention also relates to a protective textile comprising such a stab-resistant insert.

**Background of the invention.**

10 Protective textiles are becoming increasingly important as violence is increasing and is frequently taking forms as attacks on human persons with daggers and theft of luggage with knives in canvasses.

15 Synthetic fibers such as aramid fibers and high-density high-molecular weight polyethylene fibers have proved to be suitable for bullet-resistance. With respect to stabs such as knives and daggers, however, these fibers only have a poor performance. This is due to the inherent weakness of these synthetic fibers – and of all synthetic fibers - when it comes to transversal resistance.

20 Metal, and more particular steel, has more resistance to radial compression.

The prior art has already recognized this property of metal and steel. EP-A2-0 769 671 discloses an anti-stab material with a set of metal strands which are secured to a non-metallic support fabric. The metal strands are uni-directional.

25 US-A-5,883,018 discloses an optimization of the metal strands for use in anti-stab material. Steel cords with two or more different twisting angles are used to increase the potential to stop penetrating knives.

30 WO-A1-98/45516 discloses an anti-stab material where steel cords form a lattice, i.e. where both the weft and warp are formed by steel cords.

35 Conflicting requirements are put on body armor and protective textile. On the one hand, comfort requirements push the designers towards the use of less material. On the other hand, safety standards increase the amount of impact absorbing and anti-stab materials.

**Summary of the invention.**

It is an object of the present invention to avoid the drawbacks of the prior art.

5 It is another object of the present invention to provide for a material which provides both comfort and safety for protective textiles.

It is also an object of the present invention to provide for interaction and synergy between metal and textile.

10 According to the present invention there is provided a stab-resistant insert for protective textile. The insert comprises at least one metal layer and at least one textile layer.

The textile layer is in contact with and is connected to the metal layer. The textile layer comprises a non-woven material.

15 The terms "non-woven material" include fibrous structures made by such processes as dry, wet, or air laying, needle-punching, spun-bond processes, and hydro-entanglement. The term non-woven material excludes woven, knitted, and tufted structures. The terms  
20 "non-woven fabric" refer to a fabric the fibers of which are either mechanically entangled or chemically bonded to each other.

The use of the non-woven material leads to a greater deformability, an increased flexibility and to a possibility of obtaining lower weights  
25 of the protective textile. These features all increase the comfort. The use of the non-woven material also leads to a greater damping potential and impact absorption, which increases the safety.

30 The metal layer generally comprises elongated metal elements selected from a group consisting of metal wires, metal cords, metal fibers and yarns comprising metal fibers. The metal is usually a plain carbon steel or a stainless steel. In case of carbon steel, the wires and cords are preferably covered with a corrosion-resistant coating  
35 such as zinc or a zinc alloy.

5 In a first embodiment of the present invention, the elongated metal elements are unidirectional within one single metal layer, i.e. the elongated metal elements do not cross each other. The metal elements are bonded to the non-woven material by means of an adhesive or by means of a thermoplastic film in order to decrease the likelihood of the elongated metal elements shifting towards each other. In this first embodiment, preferably more than one metal layer is provided. In the various metal layers the elongated metal elements have at least two different directions for the elongated metal elements. When a knife happens to have penetrated a first metal layer, the likelihood of being stopped in a second or subsequent metal layer increases if the second or subsequent metal layer have directions different from the direction in the first layer. Similarly, the likelihood of stopping a knife increases if the number of metal layers increases. However, the number of metal layers is limited by reasons of weight and stiffness. Up to six unidirectional metal layers are possible. Two, three and four uni-directional layers are preferable.

20 In a second embodiment of the present invention, at least one metal layer is multi-directional, e.g. bi-directional. This means that within one single metal layer, the elongated metal elements cross each other. This can be realized by welding or by weaving the warp and weft elongated metal elements. Preferably, the warp and weft elongated elements are woven. Preferably the warp and weft elongated elements make a right angle (90 °) with each other. The non-woven material is bonded to the metal layer by means of either an adhesive or by means of a thermoplastic film or by means of stitches. This second embodiment has the drawback of having a metal layer which is somewhat stiffer than a single metal layer out of the first embodiment (uni-directional) but has the advantage that in the final insert, less metal layers are required for a same degree of stab resistance. One or two multi-directional metal layers are preferred. This reduced number of metal layers in the second embodiment may lead to more flexibility or to less weight, compared

to the first embodiment.

5 For both the first and the second embodiment, the inventors have experienced that it is advantageous if the non-woven material comprises some parts, which penetrate between the elongated elements of the metal layer. This penetration may be realized, for example, by needle felting the non-woven material so that the fibers are no longer oriented two-dimensionally alone in the plane of the non-woven material but that some of the fibers are also oriented in a plane perpendicular to the plane of the non-woven material. In this way some of the fibers protrude out of the plane of the non-woven material to penetrate between the elongated elements. This penetration decreases the likelihood that the elongated elements shift towards each other. The presence of the adhesive or of the stitches  
10  
15 accentuates this effect.

The non-woven material preferably comprises synthetic fibers. The non-woven material most preferably comprises synthetic fibers which are known to have an impact absorbing effect, such as aramid fibers, para-aramid fibers, high-density high-molecular weight polyethylene  
20 fibers, poly(p-phenylene-2,6-benzobisoxazole) fibers (PBO fibers), polybenzimidazole fibers (PBI fibers) or any combination hereof.

The invention also relates to a protective textile comprising a stab-resistant insert, as described hereabove. The protective textile usually also comprises a bullet-resistant insert. The bullet-resistant insert is normally located close to the body and the stab-resistant insert normally forms the exterior part.  
25

30

**Brief description of the drawings.**

The invention will now be described into more detail with reference to the accompanying drawings wherein

35 - FIGURE 1a is a cross-section of part of a stab-resistant insert according to the invention ;

- FIGURE 1b is an enlarged view of FIGURE 1a ;
- FIGURE 2 shows a first embodiment of the present invention ;
- FIGURE 3 shows a second embodiment of the present invention.

5

**Description of the preferred embodiments of the invention.**

FIGURE 1a is a cross-section of part of a stab-resistant insert 10 according to the invention. The stab-resistant insert 10 has a single  
10 uni-directional layer of steel cords 12 lying in parallel to each other. The steel cords 12 are of the type 3x3x0.18 in this example. The steel cords 12 form the warp of a woven structure. The weft (not shown) is formed by a dipped nylon. The weft may also be formed by means of aramide fibers or by means of high-density high-  
15 molecular weight polyethylene fibers. The distance between the steel cords is 2.2 mm. Generally, this distance may vary between 0.4 mm and 3.2 mm, e.g. between 0.5 mm and 3.0 mm, whereby the distances are measured as pitches of the cords, i.e. between the axes of the cords. Above the layer of steel cords 12 is a non-woven fabric  
20 14 and under the layer of steel cords 12 is also a non-woven fabric 16. The non-woven fabric is a needle-felt composed with polyacrylate, para-aramid and oxidized polyacrylonitrile fibers. It has a thickness of about 2.30 mm ( $\pm 0.30$  mm) and a weight of about 80 g/m<sup>2</sup> ( $\pm 8\%$ ). Both non-woven fabrics 14 and 16 are bonded to the  
25 layers of steel cord 12 by means of a thin thermoplastic film such as polyamide. Adhesives may also be used such as acrylate-based or polyurethane-based adhesives. Due to the needle-felt character of the non-woven fabric, some fibers 19 are directed in a third dimension, i.e. in a plane perpendicular to the plane of the non-  
30 woven fabric and penetrate in the openings between the steel cords 12.

FIGURE 2 illustrates a first embodiment of the present invention. The stab-resistant insert has four different parts 10, 20, 30 and 40. Each  
35 part 10, 20, 30 and 40 is analogous to the structure of FIGURE 1a

and FIGURE 1b, i.e. each part 10, 20, 30 and 40 has resp. a layer of steel cords 12, 22, 32 and 42, which are sandwiched between two non-woven fabrics. The distance between the individual steel cords varies from 0.5 mm to 3.0 mm. The typical form of each part 10, 20, 30 and 40 corresponds to a male back. This typical form has been obtained by means of laser cutting. An additional advantage of using a non-woven fabric according to the present invention is that the non-woven fabrics prevent the steel cords from unraveling, either before or after the laser cutting. In other words the non-woven fabrics favor the integrity of the insert. The presence of an adhesive accentuates this advantage.

An insert as stab-resistant element according to this first embodiment of FIGURE 2 has proved to be successful in combination with a bullet resistant element having a number of layers of high-density high-molecular weight polyethylene fibers (in the market known as DYNEEMA® fibers). The presence of the stab-resistant insert decreases the required number of layers of DYNEEMA® fibers. The reason is that the exterior part is formed by the stab-resistant insert and that this stab-resistant insert may stop already the bullets or at least slows down the bullets.

FIGURE 3 shows a second embodiment of the present invention. The stab-resistant insert 50 comprises a metal layer having steel cords 52 and 53, which cross each other. The metal layer may be formed by a woven structure where both the warp and the weft are steel cords. The distance between the warp steel cords 52 ranges from 0.5 mm and 3.0 mm. The distance between the weft steel cords 54 ranges from 0.5 mm and 3.0 mm. Above the woven metal structure is a non-woven fabric 54 and under the woven metal structure is also a non-woven fabric (not shown). The non-woven fabrics are bonded to the metal layer by means of an adhesive or by means of stitching. The typical form of stab-resistant insert 50 corresponds to a female front. Here again this form has been realized by means of laser-cutting.

This second embodiment has proved to be particularly successful as



stab-resistant element in combination with a stack of layers of para-aramid or aramid fibers as bullet-resistant element.

5 The present invention is not limited to a particular type of elongated metal elements. Metal wires and metal yarns are suitable. However, because of flexibility reasons coupled with safety reasons preference is given to metal multi-strand metal cords with relatively thin filaments, i.e. filaments with a diameter ranging from 0.03 mm to 0.25 mm.

10 Multi-strand metal cords are usually of the  $m \times n$ -type, where  $m$  is the number of strands and  $n$  is the number of filaments within one strand. Examples of multi-strand cords are :

3x3  
7x3  
15 7x4  
4x7  
3 + 5x7  
7x7.

20 Other cord types or not excluded. These other cord types may be of following general structure :

$1 + m (+n)$  : 1 core filaments, a layer of  $m$  filaments and, possibly a layer of  $n$  filaments  
 $n \times 1$  :  $n$  filaments twisted together  
 $m + n$  :  $m$  filaments in parallel, surrounded by  $n$  filaments  
25 twisted around each other and around the  $m$  filaments  
 $1 \times n$  CC : compact cord with  $n$  filaments all twisted with the same twisting step in the same twisting direction.

30 The invention is neither limited to a particular type of coating on the metal cords in the metal layer. However, in case the stab-resistant insert is used in a protective textile, which needs to be washed or cleaned, preference is also given to metal cords out of stainless steel or to steel cords being covered with a corrosion-resistant coating such as zinc or a zinc aluminum alloy (from 2% to 9% aluminum).

-8-

The invention is suitable for all common and available final tensile strengths from 1500 MPa to about 3500 MPa and more.

## CLAIMS

1. A stab-resistant insert for protective textile, said insert comprising :  
5       at least one metal layer ;  
       at least one textile layer ;  
       said textile layer being in contact with and being connected to said metal layer;  
       characterized in that said textile layer comprises a non-woven material.  
10
2. A stab-resistant insert according to claim 1, wherein said metal layer comprises elongated metal elements selected from a group consisting of metal wires, metal cords, metal fibers and metal  
15       yarns.
3. A stab-resistant insert according to claim 2, wherein said elongated metal elements are unidirectional within said metal layer and wherein said elongated metal elements are bonded to  
20       said non-woven material by means of an adhesive or by means of a thermoplastic film.
4. A stab-resistant insert according to claim 3, wherein said insert  
25       comprises more than one metal layer.
5. A stab-resistant insert according to claim 4, wherein said more than one metal layers having different directions wherein said elongated metal elements run.
- 30       6. A stab-resistant insert according to claim 2 wherein said at least one metal layer is multi-directional.
- 35       7. A stab-resistant insert according to claim 6 wherein said non-woven textile material is bonded to said metal layer by means of an adhesive or by means of a thermoplastic film or by means of

stitches.

- 5           8. A stab-resistant insert according to any one of claims 2 to 7,  
              wherein part of said non-woven material penetrates between the  
              elongated metal elements to decrease the likelihood of shifting  
              the elongated metal elements in said metal layer.
- 10          9. A stab-resistant insert according to any one of the preceding  
              claims, wherein said non-woven material comprises synthetic  
              fibers.
- 15          10. A stab-resistant insert according to claim 9, wherein more than  
              thirty per cent of said synthetic fibers is selected from a group  
              consisting of aramid fibers, high-density high-molecular weight  
              polyethylene fibers, poly(p-phenylene-2,6-benzobisoxazole)  
              fibers, polybenzimidazole fibers, or any combination thereof.
- 20          11. A protective textile product comprising a stab-resistant insert  
              according to any one of the preceding claims.

**ABSTRACT :**

A stab-resistant insert for protective textile comprises :

- 5       at least one metal layer ;
- at least one textile layer.

The textile layer is in contact with and is connected to the metal layer. The textile layer comprises a non-woven material.

The stab-resistant insert combines a high level of stab-resistance with a high degree of comfort.

10

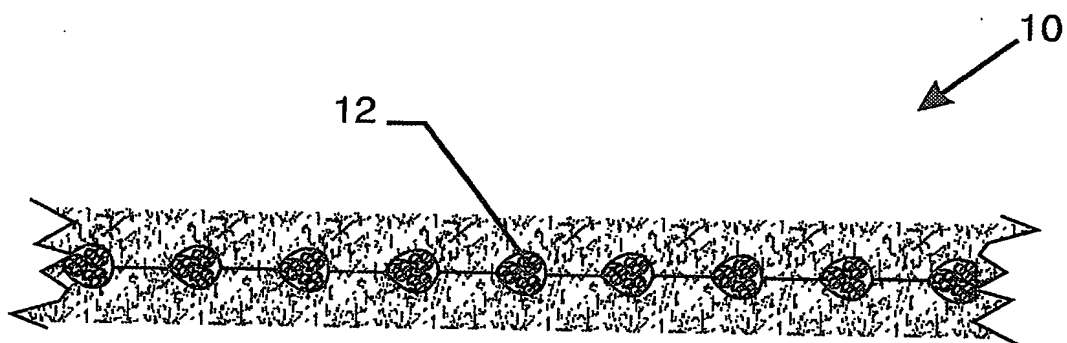


Fig. 1a



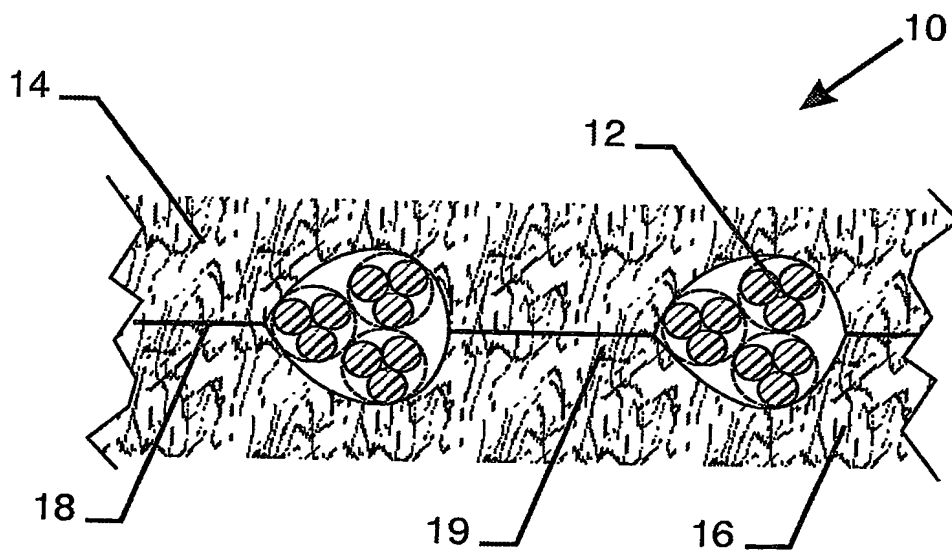


Fig. 1b

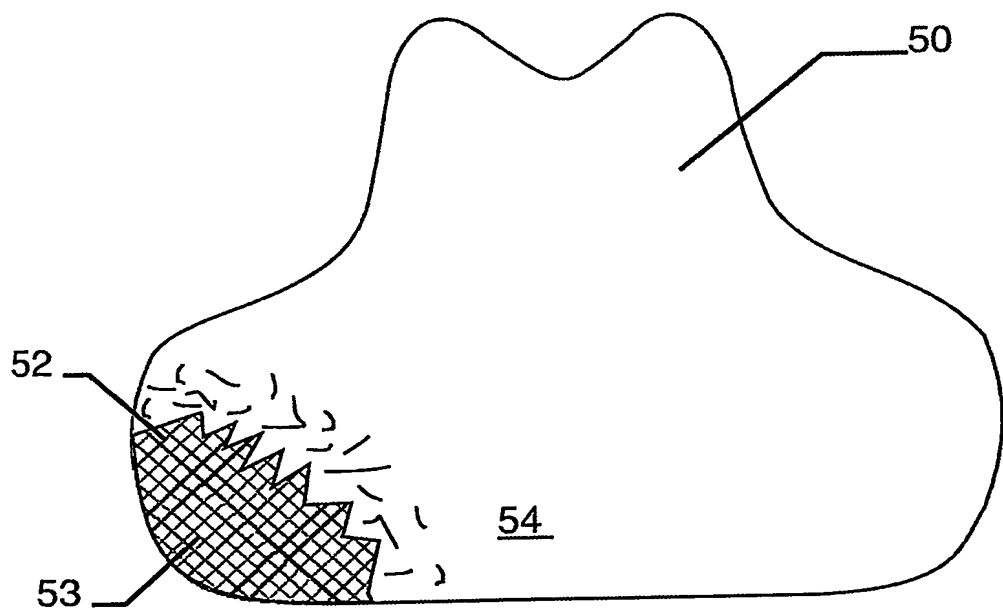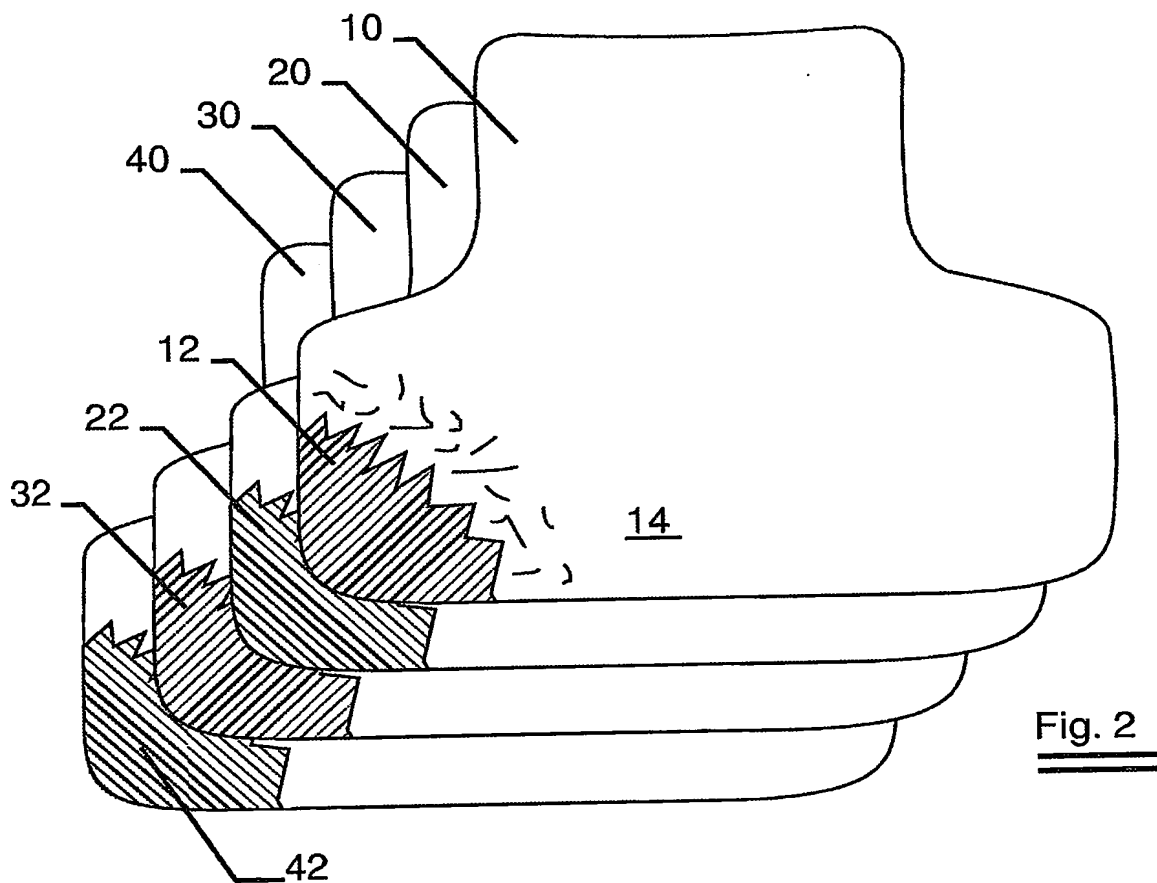

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**